



# ADHESIVA TNT

## WALL COVERING

Technical Data Sheet

Revised: 04/2021

### DESCRIPTION

Powder adhesive for non-woven fabric and vinyl wall coverings. It can also be used in combination with all ACM Starch products

- + Does not stain
- + Strong initial tack
- + High yield
- + Zero C.O.V.
- + Antibacterial and anti-mold properties
- + Ready for action within 5 minutes after dilution

Suitable for:

- non-woven wall coverings
- vinyl wall coverings with fleece support
- fiberglass coatings
- foam backing wall coverings or non woven fabric wallpapers

### SURFACE PREPARATION

All surfaces must be dry, absorbent, strong, free of dust or paints or oils. Any cracks or holes in the wall must be covered with our extra-light GLASTER and in case of imperfections shaved with a normal stucco plaster.

We always recommend the use of our PRIMER AC fixative for consolidation and cleaning.


We recommend using our PRIMER SP (specific for wet walls with fungi and mold) in case of rising damp or too humid.

### PREPARATION AND YIELD OF THE ADHESIVE

Dilute ADHESIVA TNT in clean water according to the table:

| DILUTION FOR 300 G              |  |  | m <sup>2</sup> |
|---------------------------------|---|---|----------------|
| Seizing   Fixing of the surface | 10 l  | -   | 80             |
| Vinyl and expanded              | 7 l   | 8/9   | 60             |
| Non woven                       | 5 l   | 7   | 40             |
| Fibre glass                     | 4 l   | 5   | 30             |

1. Vigorously mix the water.
2. Dilute the contents of the bag in cold water, stirring continuously.
3. Wait 3 minutes.
4. Mix again.
5. The product is ready for use after 5 minutes.

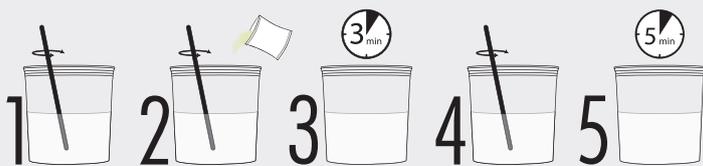

### APPLICATION OF THE ADHESIVE

ROLLER - Apply the product directly on the wall with a roll short wool for about 10/15 m<sup>2</sup>. Proceed accordingly to the application of wall covering.

Video tutorial: <https://www.youtube.com/watch?v=2p-pteh2B1Y>

### CLEANING

Clean possible spills with a damp sponge. The product does not stain.

### CONTRAINDICATIONS

The product is not suitable on non-absorbent substrates, humid walls with mold or on surfaces not perfectly prepared. Spillage of the adhesive should be removed immediately.

### PACKAGES

box of 300 g  
(24 pcs x 300 g)  
box of 600 g  
(12 pcs x 600 g)

code 10016

code 10130

### STORAGE

The product is guaranteed for 60 months from the date of production. Do not freeze. Store in a dry place.

### TECHNICAL DATA

|                          |                 |
|--------------------------|-----------------|
| base:                    | starch          |
| appearance:              | flakes          |
| color:                   | white           |
| percentage of solid:     | 100%            |
| customs code:            | 3505 2030       |
| flash:                   | no              |
| application temperature: | + 5 °C + 40 °C  |
| open time:               | 20 - 30 minutes |
| setting time:            | 48 hours        |
| not harmful              |                 |
| not sensitive to frost   |                 |

### FINAL PROVISIONS

Keep out of the reach of children and pets. Discharge the waste in special containers for building materials.



ACM Italy S.r.l. | Via Enrico Mattei, 8 | 20010 Casorezzo /MI  
PHONE +39 02 903 611 48 | [laboratorio@acm-italy.com](mailto:laboratorio@acm-italy.com) | [www.acm-italy.com](http://www.acm-italy.com)